




Wire Rod Pre-Feeding and Straightening Units MRE-2

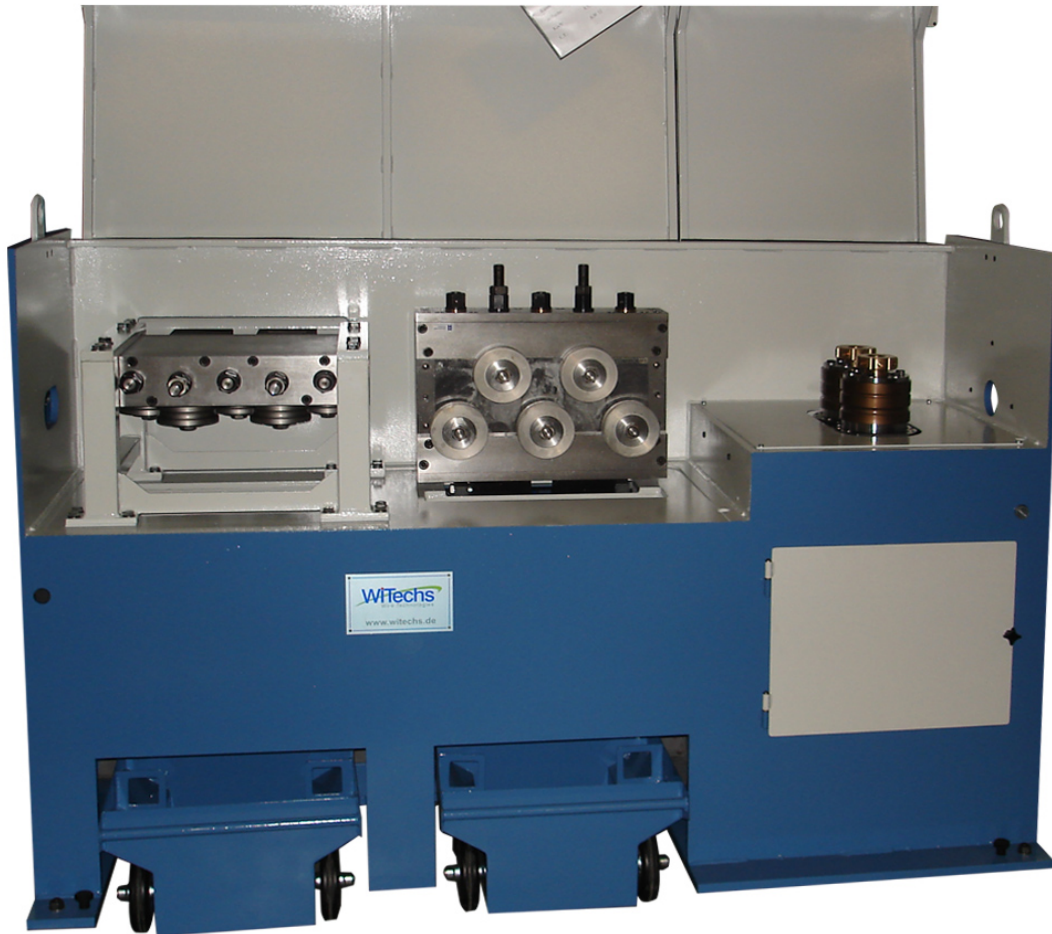

Pull-in and straightening device to pre-feed wire rod within a drawing line
Central setting of both feeding roller by means of a hydraulic cylinder
Due to a special mechanism zero line setting possible
Hydraulically driven feeding roller
2 heavy duty straightening devices in horizontal and vertical alignment
Hydraulic aggregate in scope of delivery

Technical specifications

| | |
|-----------------------------|---------------|
| Wire diameter (low carbon) | 5,5 - 18,0 mm |
| Wire diameter (high carbon) | 5,5 - 12,0 mm |
| Wire passing speed | ca. 0,15 m/s |