




Wire Stress Relieving Device DEG-S7/1

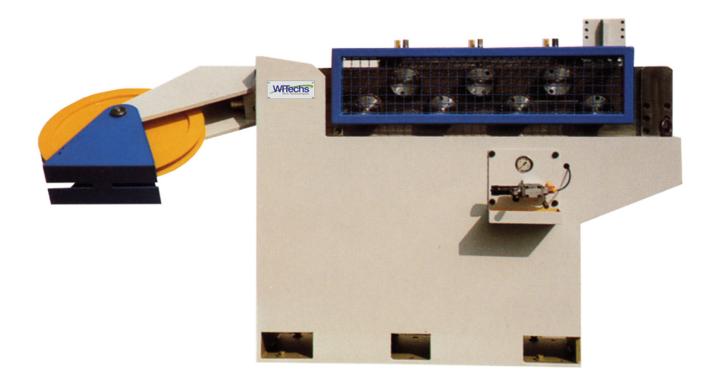

Improves the tensile strength to yield strenght (Rm/Re) ratio
Improves the total uniform elongation (Agt)
Stress relieving of the wire rod due to a proven 5 roller straightening unit in tow planes
Presetting of the upper stress relieving rollers pneumatically (hydraulically as an option) cylinder
Adjustable via threaded spindle

Stress releiving rolls out of tool-steel with tungsten carbide inserts

Technical specifications

Wire diameter (low carbon) 5,0 - 16,0 mm Wire diameter (high carbon) -

Wire passing speed up to 8,0 m/s