




Wire Rod Pre-Feeding and Straightening Units MRE

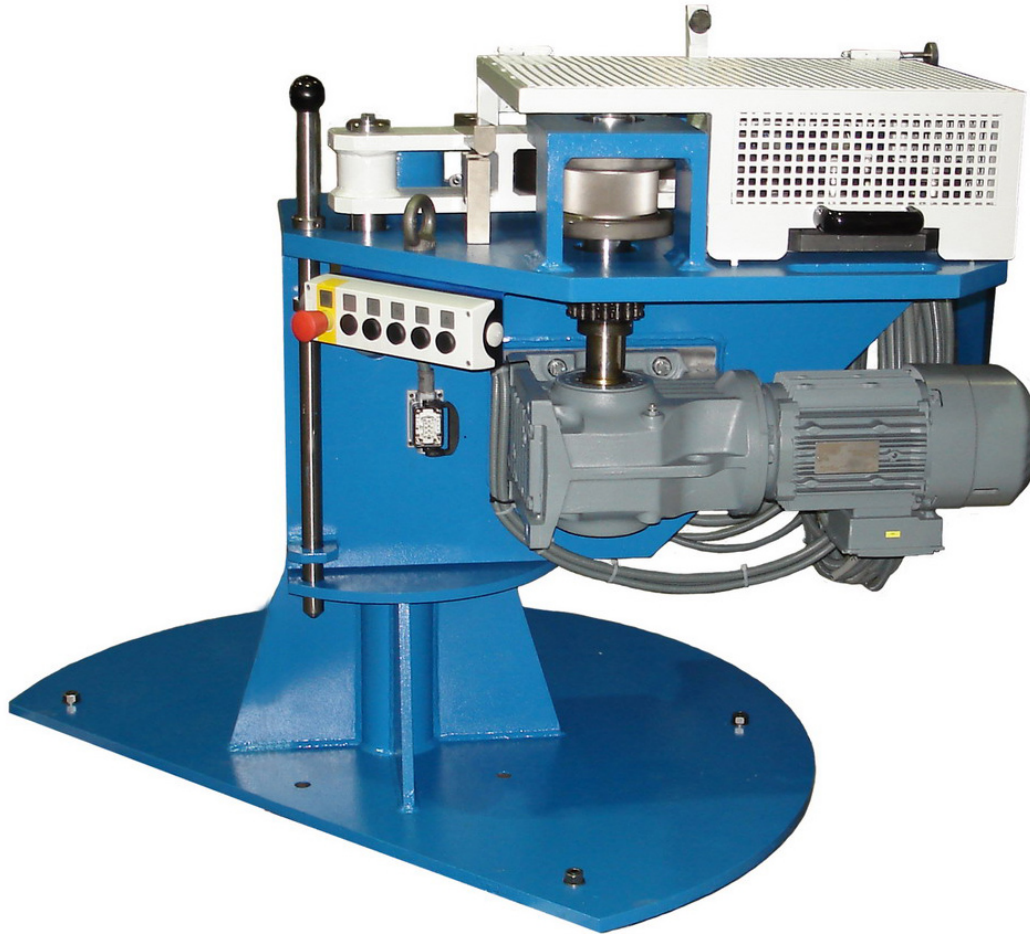

Pull-in and straightening device to pre-feed wire rod within a drawing line
Setting of one feeding roller by means of a hydraulic cylinder
Electrically driven feeding roller
Including 5 Roller straightening device
Swivel mounted design, during production the unit can be rotated out of the wire rod area
Hydraulic aggregate in scope of delivery

Technical specifications

Wire diameter (low carbon)	5,5 - 18,0 mm
Wire diameter (high carbon)	5,5 - 10,0 mm
Wire passing speed	ca. 0,15 m/s